


Vended 20-100 lb G400/G600 Washer-Extractor Specifications

Huebsch is the answer.



Vended Galaxy™ 400, 600
Washer-Extractors with
eBoost

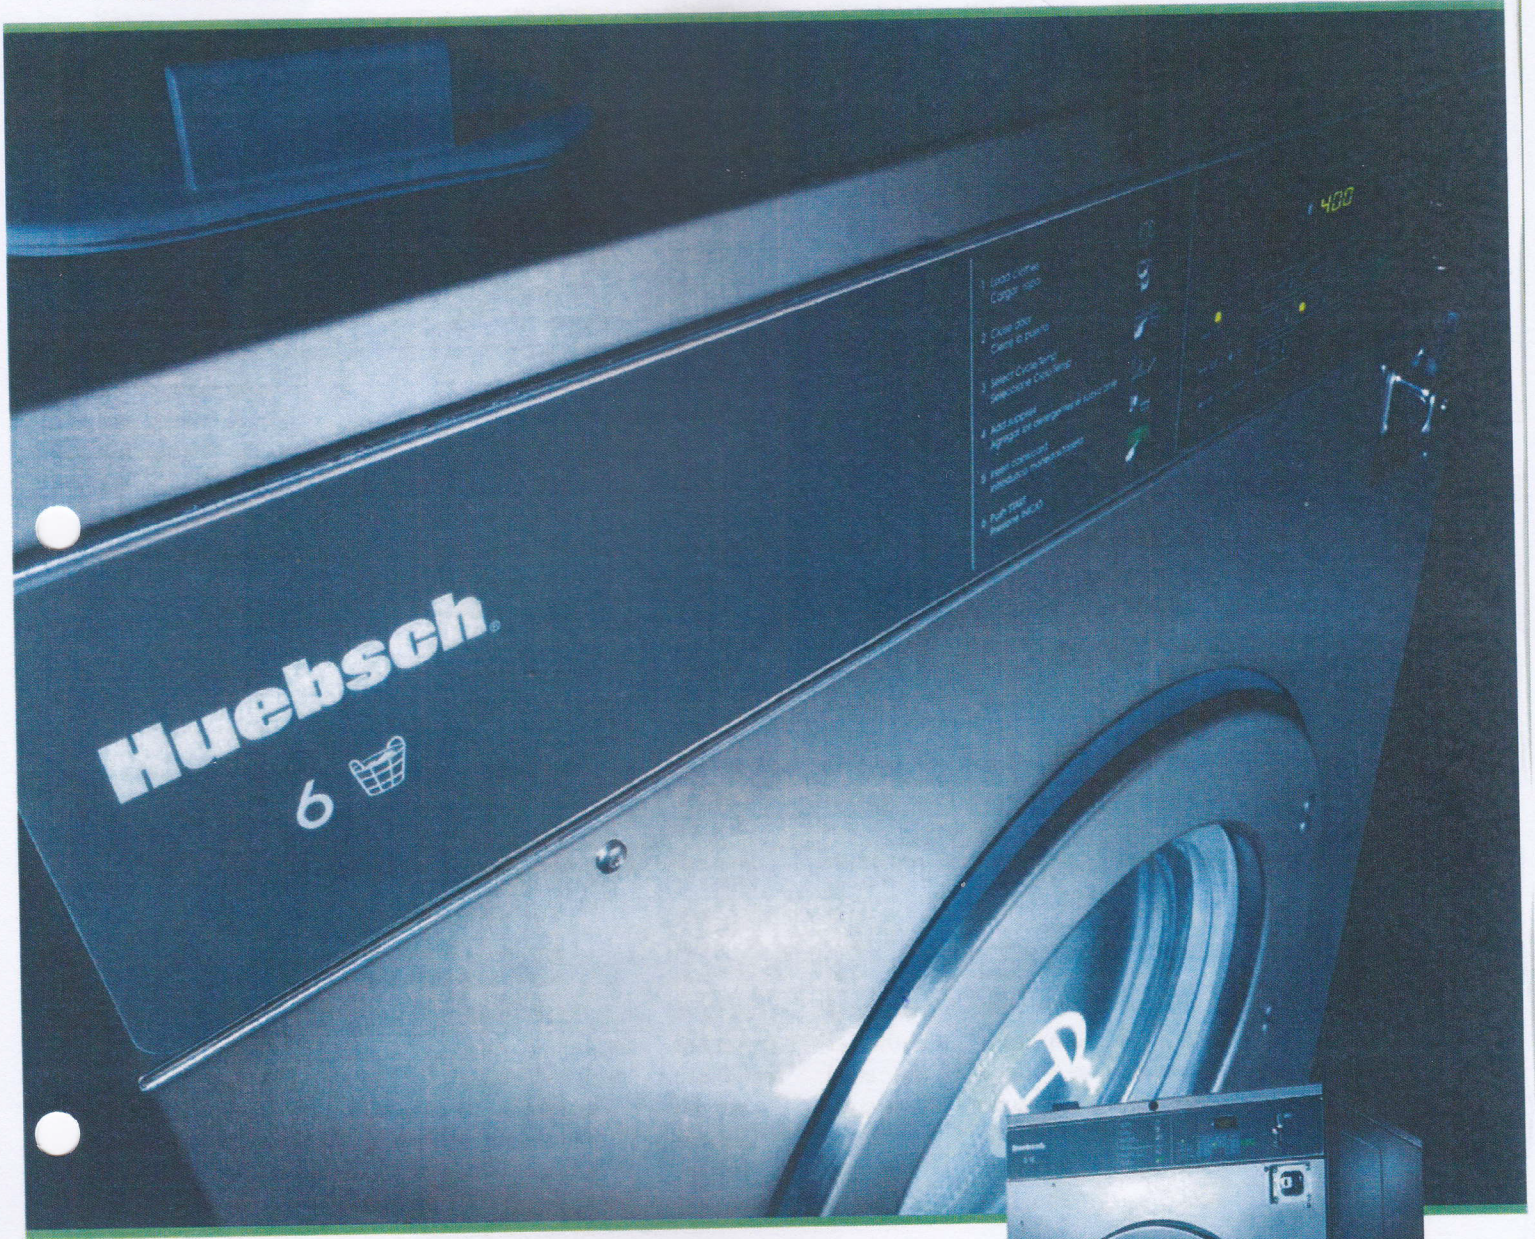

 **Huebsch**

Vended 20-100 lb G400/G600 Washer-Extractor Specifications

Models	HCN020	HCN030	HCN040	HCN060	HCN080	HCN100	
Control Option	Galaxy 600, Galaxy 400	Galaxy 600, Galaxy 400	Galaxy 600, Galaxy 400	Galaxy 600, Galaxy 400	Galaxy 600, Galaxy 400	Galaxy 600, Galaxy 400	
Capacity - lb (kg)	20 (9)	30 (13.6)	40 (18)	60 (27)	80 (36)	100 (45)	
Overall Width - in (mm)	26 (660)	29 (737)	30 5/8 (777)	34 1/16 (866)	41 1/2 (1054)	41 1/2 (1054)	
*Overall Depth - in (mm)	30 1/4 (767)	34 9/16 (878)	39 3/4 (1009)	42 9/16 (1081)	48 5/8 (1234)	52 5/8 (1336)	
Overall Height - in (mm)	43 (1092)	45 (1143)	47 1/4 (1199)	50 (1270)	56 3/16 (1427)	56 3/16 (1427)	
Cylinder Diameter - in (mm)	21 (533)	24 (610)	26 1/4 (667)	30 (762)	36 (914)	36 (914)	
Cylinder Depth - in (mm)	13 3/4 (349)	16 (406)	20 1/4 (514)	22 (559)	22 (559)	26 (660)	
Cylinder Volume - cu. ft. (liters)	2.76 (78.1)	4.19 (118)	6.34 (180)	9.0 (255)	12 3/8 (367)	15 5/16 (434)	
Door Opening Size - in (mm)	11 5/8 (295)	14 5/16 (364)	16 1/4 (413)	16 1/4 (413)	18 1/2 (470)	18 1/2 (470)	
Door Bottom to Floor - in (mm)	14 3/8 (365)	14 (356)	14 9/16 (370)	14 15/16 (379)	17 15/16 (455)	17 15/16 (455)	
Water Inlet Connection - in (mm)	2 @ 3/4 (19)	2 @ 3/4 (19)	2 @ 3/4 (19)	2 @ 3/4 (19)	2 @ 3/4 (19)	2 @ 3/4 (19)	
Drain Diameter - in (mm)	1 @ 2 (52)	1 @ 2 (52)	1 @ 3 (76)	1 @ 3 (76)	1 @ 3 (76)	1 @ 3 (76)	
Drain Height to Floor - in (mm)	4 1/2 (114)	4 1/2 (114)	4 13/16 (122)	4 11/16 (119)	5 3/4 (145)	5 3/4 (145)	
Motor Power Consumption - HP (kW)	1 (.75)	1 (.75)	2 (1.7)	3 (2.2)	5 (3.7)	5 (3.7)	
Total # of Speeds	6, 9	6, 9	6, 9	6, 9	6, 9	6, 9	
Cylinder Speeds - RPM (G-Force)	Gentle	37 (0.4)	34 (0.4)	33 (0.4)	31 (0.4)	28 (0.4)	28 (0.4)
	Wash	51 (.8)	48 (.8)	46 (.8)	43 (.8)	39 (.8)	39 (.8)
	Distribution	92 (2.5)	86 (2.5)	82 (2.5)	77 (2.5)	70 (2.5)	70 (2.5)
	Very Low	301 (27)	282 (27)	269 (27)	252 (27)	230 (27)	230 (27)
	Low	518 (80)	485 (80)	464 (80)	434 (80)	396 (80)	396 (80)
	Medium	579 (100)	542 (100)	518 (100)	485 (100)	443 (100)	443 (100)
	** High	648 (120)	606 (120)	579 (120)	542 (120)	495 (125)	495 (125)
	**Very High	710 (150)	664 (150)	635 (150)	594 (150)	542 (150)	542 (150)
**Ultra High	819 (200)	766 (200)	733 (200)	686 (200)	626 (200)	568 (165)	
*** B	120/60/1	15-12	N/A	N/A	N/A	N/A	
Voltage wires/ Circuit Breaker - FLA	X	200-208/220-240/50/60/3/1/3	15-6 (1 Ph) 15-4 (3 Ph)	15-7 (1 Ph) 15-5 (3 Ph)	15-10 (1 Ph) 15.6 (3 Ph)	15-11 (1 Ph) 15-8 (3 Ph)	20-16 (1 Ph) 15-11 (3 Ph)
	Q	200-208/220-240/50/60/3/3	15-5	15-5	15-6	15-8	15-11
	N	440-480/50/60/3/3	15-4	15-4	15-5	15-6	15-8
	P	380-415/50/60/3/3	15-4	15-4	15-5	15-6	15-8
	Shipping Dimensions Approx. - in (mm)	Width	28 (711)	31 1/2 (800)	32 1/2 (826)	37 1/2 (953)	44 (1118)
Depth	33 13/16 (859)	38 5/16 (973)	43 1/2 (1105)	46 15/16 (1191)	54 1/2 (1384)	58 1/2 (1486)	
Height	49 3/8 (1256)	51 5/16 (1303)	53 5/8 (1361)	56 5/16 (1430)	58 5/8 (1488)	58 5/8 (1488)	
Net Weight - lb (kg)	335 (152)	460 (209)	550 (249)	695 (315)	1210 (549)	1260 (572)	
Shipping Weight - lb (kg)	365 (166)	495 (225)	590 (268)	745 (338)	1260 (572)	1310 (594)	
Slat Crate Shipping Weight - lb (kg)	450 (204)	590 (268)	690 (313)	860 (390)	1385 (628)	1435 (651)	
Agency Approvals	cETLus, CE	cETLus, CE	cETLus, CE	cETLus, CE	cETLus, CE	cETLus	

*Overall depth includes vacuum breaker to door handle.

**High, Very High, and Ultra High Spin Speeds are available on the Galaxy 600 models only.

***Circuit breaker and amp draw data shown are for models without electric heat. Consult factory for other configurations. Manufacturer strongly recommends using a circuit breaker instead of fuses. Use 3-pole circuit breakers for 3-phase machines.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2000.

Printed in the USA

©2013 Alliance Laundry Systems LLC



Alliance Laundry Systems, Shepard Street P.O. Box 990, Ripon, WI 54971 • 1-800-553-5120 • www.huebsch.com

AH13-0009